

Full Load Tested

Every generator is 100% load tested



DSE7310 Controller

Provides immediate performance information



Coolant Heater

Provides immediate performance information



Battery Charger

Standard 10A 12/24V Automatic Charger




Certifications

The design, construction and performance of our generators conform to UL and CSA standards



Service & Support


Dealer network located throughout North America



Rugged Design



Baudouin Industrial Engine

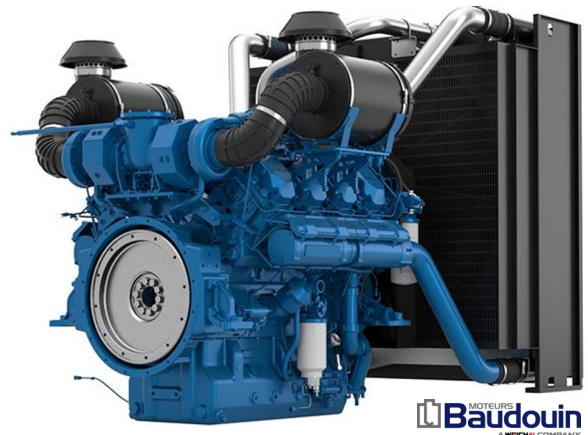

MOTEURS **Baudouin**
A WEICHAI COMPANY

Cummins Industrial Genend



STAMFORD
power generation

ELECTRICAL

VOLTS	POWER FACTOR	STANDBY			PRIME			CIRCUIT BREAKER
		WATTS	KVA	AMPS	WATTS	KVA	AMPS	
120/208V 3-PH	0.8	700,000	875	2,428	630,000	787.5	2,185	2500
120/240V 3-PH	0.8	700,000	875	2,104	630,000	787.5	1,894	2500
277/480V 3-PH	0.8	700,000	875	1,052	630,000	787.5	947	1250
347/600V 3-PH	0.8	700,000	875	841	630,000	787.5	757	1000

ENGINE

ENGINE BRAND	BAUDOIN
ENGINE MODEL	8M33G4D2/6
EMISSIONS	EPA TIER II
ENGINE STARTER	24VDC
ENGINE SPEED	1800 RPM
ENGINE CYLINDERS	8
ENGINE (W/FAN) HP/kWm	1073/800
FREQUENCY (1)	60HZ
GOVERNOR	ELECTRONIC
FLYWHEEL	SAE No.0
ROTATION	CCW
ASPIRATION	TURBO CAC
COOLANT W/ RADIATOR	58.11 GAL
BORE/STROKE	150mm X 185mm
DISPLACEMENT	26.4L
RECOMMENDED OIL (2)	5W-40 SAE
OIL CAPACITY	29.1 GAL
COMBUSTION SYSTEM	DIRECT INJECTION
COMPRESSION RATIO	15:1
FAN TYPE	PUSHER
INTAKE AIR CONSUMPTION	3217 CFM
RADIATOR COOLING FLOW	58,269 CFM
EXHAUST FLOW AT TURBINE	7,366 CFM
STARTING TEMP W/BLOCK HEATER	-13°F

NOTES: (1) Steady state frequency regulation. (2) The recommended oil is for normal applications. See operator's manual for the recommended oil for your needs.

DBA @ 7 METERS [FULL LOAD]

OPEN UNIT	98
HOUSED: LEVEL 2/ LEVEL 3	80/78

ELECTRICAL

MOTOR STARTING (CODE G)	460 HP	
TOTAL HARMONIC DISTORTION	< 5%	
FLOATING NEUTRAL	YES	
FORKLIFT POCKETS	NO	
ASSEMBLED IN	NORTH AMERICA	
EPA APPROVED	ESP	
CERTIFICATIONS		
	C/UL	Yes
	ISO 9001	Yes
	NFPA110	Yes
UNIT WARRANTY STANDBY(1)	2 YEARS/ 1000HRS	

NOTES: (1) For more generator warranty, see operator's manual.

GENERATOR END

WINDING	12 LEAD
WIDING NUMBER	311
VOLTAGE REGULATION	AVR +/- 1%
AVR TYPE	MX321
PMG	STANDARD
TEMPERATURE RISE	125/40°C
BRUSHLESS	YES
ROTOR	2/3 PITCH
WINDINGS	100% COPPER
STATOR WINDING	DOUBLE LAYER LAP
COUPLING	DIRECT/FLEX DISC
BEARINGS	SINGLE (MAINTENANCE FREE)
EFFICIENCY PEAK	95
INSULATION	CLASS H
INGRESS PROTECTION	IP23

BLOCK HEATER

VOLTS		120
WATTS		3,000
AMPS		25
THERMOSTAT	ON	100°F
	OFF	120°F

DERATES

ABOVE SEA LEVEL		
>1000FT		5.5% EVERY 1,640 FT
MAX OPERATING TEMPERATURE		122°F
	1.5% EVERY 10°F OVER 77°F AIR INLET	

FUEL CONSUMPTION

Load	Gal/Hr	L/Hr
100%	54.63	206.8
75%	37.40	141.6
50%	24.91	94.3
25%	14.82	56.10

OPTIONAL ACCESSORIES

START BATTERIES
BATTERY HEATER
GENERATOR STRIP HEATER
MIMIC PANEL
NFPA 110 LEVEL 1 UPGRADE
REMOTE MONITORING
PARALLELING PANEL DSE8610
SECONDARY BREAKER

DSE 7310 CONTROLLER

ENGINE DISPLAY / PROTECTION

ENGINE RPM	YES
LOW OIL PRESSURE	YES
HIGH COOLANT TEMP	YES
LOW COOLANT	YES
OVER/UNDER SPEED	YES
OVER CRANK	YES
CAN ECU SHUTDOWN	YES
ENGINE MAINTENANCE CODES	YES

GENSET DISPLAY / PROTECTION

VOLTAGE (L-N & L-L)	YES
OVER/UNDER VOLTAGE	YES
FREQUENCY	YES
OVER/UNDER FREQUENCY	YES
AMP DISPLAY / SHUTDOWN	YES
PHASE IMBALANCE	FIELD ENABLED
KW, KVA, KVAR DISPLAY	YES
KWH, KVAH, KVARH DISPLAY	YES
GENERATOR PHASE SEQUENCE	OPTIONAL

BATTERY


DC SYSTEM	24V
BATTERY RACK / CABLE	INCLUDED
BATTERY CHARGER	10 AMP
REQUIRED BATTERIES (1)	GROUP 8D 1200 CCA

NOTES: (1) Qty. 4 batteries are required. Batteries are not included.

DIMENSIONS

DIMENSIONS (L x W x H)	315" x 140" x 108"
WEIGHT	
OPEN	17,530 LBS
HOUSED LEVEL 3 & 24HR TANK	45,032 LBS
FREIGHT CLASS	70

NOTES: Shipping dimensions are for a housed Level 3 unit.

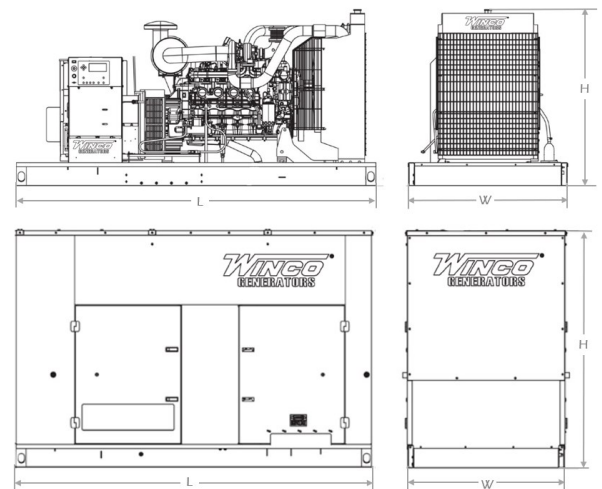

ADDITIONAL DISPLAYS / PROTECTIONS

EXTERNAL E-STOP	FIELD INSTALLED
BATTERY VOLTAGE	YES
BATTERY OVER/UNDER VOLTAGE	YES
COMMUNICATIONS	
USB CONNECTABLE	YES
RS232/RS485	YES
REMOTE DISPLAY PANEL	YES
DSE WEB NET	YES

ADDITIONAL FEATURES

AUDIBLE ALARM	YES
ENGINE EXERCISER	DISABLED
MAINTENANCE INTERVAL TIMER	DISABLED
LOAD SHEDDING / DUMMY	DISABLED
CONFIGURABLE INPUTS	4 (EXPANDABLE)
CONFIGURABLE OUTPUTS	4 (EXPANDABLE)
EVEN LOG	250

Specifications are subject to change without notice.

